



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Undercabinet T5L Series


Features

All purpose direct wire LED undercabinet light. Low profile applications include kitchens, study areas, displays and computer stations. Standard knockouts are located on top, back and ends for direct connection. A direct wire UL listed connector is included for use with 3/8" flexible conduit or 3-wire Romex.



Construction

Housing is die-formed of 22-gauge steel. Separate hinge service tray allows for easy installation and snaps into position without hardware. Power supply connections must be made inside the fixture.

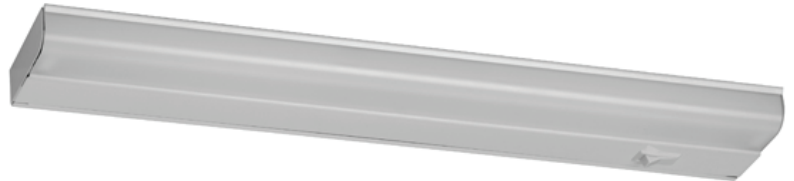

Finish

All exposed metal parts are post painted lighting grade white or oil-rubbed bronze paint.

Diffuser

Smooth white acrylic diffuser snap-fits into housing.

Electrical



Input 120 VAC/60 Hz.
Compatible with TRIAC and ELV dimmers.
On/off switch included.

LED

Integrated LED in 3000K color temperature.
Rated 50,000 hrs., 90 CRI.

Certification

Fixtures are cETLus listed for indoor damp locations.
ENERGY STAR® Qualified.
Title 24/JA8 Compliant

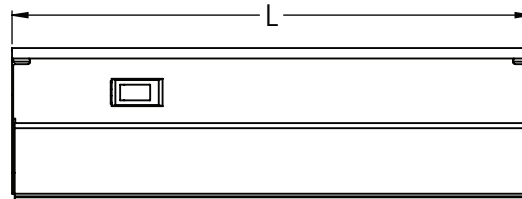

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions
subject to change without notice.**

Ordering Information:

Size	White	Oil-Rubbed Bronze	Type	Lumens	LPW	L	W	D
9 in.	T5L9RWH		5W SMT-Array	220	44	9"	3-1/2"	1-1/8"
12 in.	T5L12RWH	T5L12RRB	5W SMT-Array	315	63	12"	3-1/2"	1-1/8"
18 in.	T5L18RWH	T5L18RRB	7.5W SMT-Array	520	69	18"	3-1/2"	1-1/8"
21 in.	T5L21RWH	T5L21RRB	8.5W SMT-Array	570	67	21"	3-1/2"	1-1/8"
24 in.	T5L24RWH	T5L24RRB	9W SMT-Array	630	70	24"	3-1/2"	1-1/8"
33 in.	T5L33RWH	T5L33RRB	13.5W SMT-Array	950	70	33"	3-1/2"	1-1/8"
42 in.	T5L42RWH	T5L42RRB	16.5W SMT-Array	1150	69	42"	3-1/2"	1-1/8"